

10/29/98

JC617 U.S. PTO

09182842-102998

Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No.	BEHL1318
	First Inventor or Application Identifier	Behl
	Title	DOCKING APPARATUS FOR PC CARD DEVICES
	Express Mail Label No.	E1923462487US

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
---	---

<p>1. <input type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)</p> <p>2. <input checked="" type="checkbox"/> Specification [Total Pages <u>9</u>] (preferred arrangement set forth below)</p> <ul style="list-style-type: none">- Descriptive title of the invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the invention- Brief Summary of the invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure <p>3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets <u>4</u>]</p> <p>4. Oath or Declaration [Total Pages <u> </u>]</p> <ul style="list-style-type: none">a. <input type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 17 completed) (Note Box 5 below)i. <input type="checkbox"/> <u>DELETION OF INVENTOR(S)</u> Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b). <p>5. <input type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</p>	<p>6. <input type="checkbox"/> Microfiche Computer Program (Appendix)</p> <p>7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)</p> <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies <p>ACCOMPANYING APPLICATION PARTS</p> <p>8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))</p> <p>9. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement (when there is an assignee) <input type="checkbox"/> Power of Attorney</p> <p>10. <input type="checkbox"/> English Translation Document (if applicable)</p> <p>11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations</p> <p>12. <input type="checkbox"/> Preliminary Amendment</p> <p>13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)</p> <p>14. <input type="checkbox"/> * Small Entity Statement(s) filed in prior application (PTO/SB/09-12) <input type="checkbox"/> Status still proper and desired</p> <p>15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)</p> <p>16. <input checked="" type="checkbox"/> Other: <u>Certificate of Express Mailing</u></p> <p><small>* NOTE FOR ITEMS 1 & 14: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).</small></p>
---	--

17. If a **CONTINUING APPLICATION**, check appropriate box, and supply the requisite information below and in a preliminary amendment.


☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. 08

Prior application information: Examiner Group / Art Unit:

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label (Insert Cust. ) or ☒ Correspondence address below

Name	The Law Offices Of Kevin H. Fortin				
Address	Twin Oaks Office Plaza, Suite 112 477 Ninth Avenue				
City	San Mateo	State	California	Zip Code	94402
Country	US	Telephone	(650) 685-9270	Fax	(650) 685-9244

Name (Print/Type)	Kevin H. Fortin	Registration No. (Attorney/Agent)	35,140
Signature		Date	10/29/98

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

DOCKING APPARATUS FOR PC CARD DEVICES

Inventor:

Sunny Behl

5721 Tubac Lane

San Jose, California 95118

Attorney:

Law Offices of Kevin H. Fortin

Twin Oaks Office Plaza, Suite 112

477 Ninth Avenue

San Mateo, CA 94402

(650) 685-9270

FIELD OF THE INVENTION

The present invention pertains to memory storage devices and more particularly to mechanisms for docking PC card-type devices in memory storage device bays.

BACKGROUND OF THE INVENTION

PC cards are widely used in laptop computers for interconnecting devices including modems, network cards, flash memory, and miniature hard disk drives to the laptop computer. One major benefit of the PC cards is that they are very small. Some are sized smaller than credit-cards.

PC cards are now being used in cameras and other devices for storing data, sound and images. Some digital cameras have PC card technology, including flash memory, to record digital photographs. PC cards are removable from the camera to transport the images to a laptop or other computer. Accordingly, the recorded image can be viewed and/or printed. Most laptop computers have PC card slots built in.

Although the demand for PC card based devices such as digital cameras has increased in recent years, many desk top type personal computers are not specifically adapted to accommodate PC cards. Various externally connectable PC card devices have been developed. A typical externally connectable PC card device plugs into the parallel,

1 or serial port of a standard personal computer. Power is supplied to the PC card device
2 from an external plug, or from a keyboard connection, for example.

3 Many computer users have speakers, printers, scanners, lamps and other power
4 drawing devices plugged in near the computer system creating a tangled mess of wire.
5 Additional wires for a PC card device are undesirable. What is desired is a PC card
6 device that does not require additional wires and which conveniently connects to a
7 personal computer.

8 FIG. 1 shows a docking assembly 10 and carrier 12. The docking assembly 10 is
9 fixed in a hard drive bay of a typical personal computer 14. The personal computer 14 has
10 an internal power supply 16 and an IDE ribbon cable 18. The docking assembly 10
11 couples with the power supply 16 and the IDE ribbon cable 18 of the computer 14. The
12 docking assembly 10 includes a plug 20 for receiving the carrier 12.

13 The carrier 12 includes a base 22 and a cover 24 for housing a hard drive 16. The
14 carrier 12 slides into the docking assembly 10 to couple the hard drive 26 with the power
15 supply 16 and the IDE ribbon cable 18. Computer users rely on carriers 12 to selectively
16 interconnect multiple disk drives to the personal computer 14 having a docking assembly
17 10.

18 Summary of the Invention

19 The present invention is a way of providing a way of interconnecting a PC card
20 device to a personal computer. This is accomplished in a simple way without an
21 excessive bundle of wires, or external power connections. Since personal computers
22 typically have a limited number of IDE connections and memory storage device bays, the
23 carrier of the present invention is removable to enable sharing of the IDE connection and
24 memory storage device bay, when a PC card is not in use.

25 The present invention includes a carrier and a docking assembly. The docking
26 assembly is configured to be fixed in a standard-sized bay of a computer housing, or
27 memory storage device housing. The docking assembly includes a pair of lateral sides
28 for fixing the docking assembly in a memory storage device bay. Preferably, the docking
29 assembly has width of 5 ¼ inches for inserting the carrier in a 5 ¼ inch memory storage

1 bay. Alternatively, the docking assembly has a width of 3 ½ inches for inserting the
2 carrier in a 3 ½ inch memory storage bay.

3 The docking assembly also includes a power connector and an IDE cable
4 connector for coupling the docking assembly to a power source and an IDE interface,
5 respectively. The docking assembly also includes a docking assembly plug for
6 removeably receiving the carrier. The carrier includes a PC card device and adapter
7 circuitry including a plug. The PC card device receives PC cards and the plug
8 removeably couples the carrier with the docking assembly plug.

9
10 Brief Description of the Drawings:

11 FIG. 1 is a perspective view of a known hard disk drive docking assembly and
12 carrier.

13 FIG. 2 is an exploded perspective view of a PC Card carrier in accordance with
14 the present invention.

15 FIG. 3 is an exploded perspective view of a carrier including a fan.

16 FIG. 4 is a perspective view of an embodiment of a circuit board design for the
17 PC Card carrier.

18
19 Detailed Description of the Invention:

20 FIG. 2 shows a docking assembly 10 and a carrier 32. The docking assembly 10 is
21 adapted for coupling with an IDE ribbon cable. The docking assembly 10 includes a pair
22 of lateral sides 34. The sides 34 fix the docking assembly 10 within a memory storage
23 device bay of a personal computer, for example, to enable the docking assembly to couple
24 with the IDE ribbon cable in the personal computer. It can be appreciated, however, that
25 the present invention can also be used in a memory storage device housing, or other
26 housing having a memory storage device bay. Further, although an IDE ribbon cable
27 interface is shown, the docking assembly 10 and carrier 32 combination can be
28 configured for use with a SCSI or other desired interface. As various interface standards
29 evolve, the docking assembly 10 and carrier 32 combination can be adapted to fit each of
30 those standards without departing from the scope and spirit of the invention.

1 The docking assembly 10 has a front 36 and a rear 38. The rear 38 includes a
2 power connector 40 and a ribbon cable connector 42. The front 36 includes a lock 44 for
3 holding the carrier 32 within the docking assembly 10.

4 The docking assembly 10 includes a width "w". The width "w" is 5 ¼ inches to
5 fit in a 5 ¼ inch memory storage bay. In an alternate embodiment of the invention, the
6 width "w" 3 ½ inches to fit in a 3 ½ inch memory storage bay. It can be appreciated that
7 although this invention is configured in size to fit in standard memory storage bay sizes,
8 the invention can be adapted as the memory storage bay size standards evolve.

9 The docking assembly 10 includes a plug 46 for removeably coupling the carrier
10 32 to the docking assembly 10. The carrier 32 has a plug 48 for mating with the plug 46
11 of the docking assembly 10. The docking assembly 10 has rails 50 defined on each of the
12 lateral sides 34 for guiding and aligning the carrier 32. The carrier 32 has rails 52 to mate
13 with the rails 50 of the docking assembly 10.

14 The carrier 32 has a front 52 and a folding handle 54. The folding handle 54
15 mounts on the front 52. The front 52 of the carrier 32 defines an opening for receiving a
16 PC card. Although a folding handle 54 is shown, any handle type to enable removal of
17 the carrier 32 from the docking assembly 10 will do.

18 A PC card device 62 mounts in the carrier 32 to receive PC cards. The PC card
19 device 62 is adapted for PCMCIA standard type I, II, or III type flash memory cards.
20 According to an aspect of the invention, the PC card device 62 is adapted for Compact
21 Flash, ATA Flash, or PCMCIA hard disks. The PC card device 62 can be adapted to
22 receive other cards of like, or smaller, sizes. The PC card device 62 is capable of reading
23 and writing data to the PC cards.

24 The PC card device 62 includes adapter circuitry 64. The circuitry 64 couples the
25 PC card device 62 with the plug 48 so that the PC card device 62 can communicate with,
26 for example, either an IDE or SCSI interface.

27 FIG. 3 includes the PC card device 62 and a fan 66 mounted in the carrier 32. The
28 fan 66 couples with the plug 48 to draw power. It can be appreciated that the carrier 32
29 enables interconnection of any of a variety of devices, including PC card devices, hard
30 disk drives, cooling fans, etc. to a docking assembly in a memory storage device bay.

1 FIG. 4 shows a portion of the PC card device 62 including adapter circuitry 64.
2 The circuitry includes a PCMCIA type III slot 68, a COMPACT FLASH slot 70, an IDE
3 interface pin connector 72 and the plug 48. A ribbon cable 74 couples the pin connector
4 72 with the plug 48.

5 The circuitry 64 mounts in the carrier 32 (FIG. 3). Both slots 68 and 70 receive
6 PC cards. The circuitry 64 adapts the PC card slots 68 and 70 to communicate with the
7 IDE interface pin connector 72. Accordingly the circuitry 64 enables PC cards to
8 communicate with a docking assembly via the plug 48. The circuitry 64 is configured so
9 that the PCMCIA slot 68 and the COMPACT FLASH slot 70 are offset so that both slots
10 68 and 70 can be used simultaneously.

11 This detailed description is presented by way of example only. Various
12 modifications, additions and variations of the disclosed apparatus are possible.
13 Accordingly, the invention is to be limited only by the claims below.

14

CLAIMS

I claim:

1. A carrier for interconnecting a PC card device to a personal computer, comprising:
a carrier having a front, and a rear, the front has an opening for receiving at least one PC card, the rear has a plug for removeably interconnecting the carrier with a docking assembly;

a PC card device having adapter circuitry mounted on the carrier and coupled to the plug, the adapter circuitry including at least one PC card slot.

2. A carrier as set forth in claim 1, wherein the PC card device has two card slots.

3. A carrier as set forth in claim 1, wherein the PC card device has a PCMCIA type III slot and a COMPACT FLASH slot for reading and writing to PC cards of various configurations.

4. A carrier as set forth in claim 2, wherein the adapter circuitry includes an IDE interface pin connector and the IDE interface pin connector couples with the plug.

5. A carrier as set forth in claim 3, wherein the PC card device includes a ribbon cable extending from the IDE interface pin connector to the plug.

6. A carrier as set forth in claim 1, wherein the carrier includes a folding handle mounted on the front.

1 7. A carrier and docking assembly in combination for removeably
2 interconnecting a PC card device with a computer, comprising:
3 a docking assembly configured to be fixed in a bay of a computer housing, the
4 docking assembly includes a plug for the carrier, a power connector and a pin connector,
5 the pin connector is adapted for connection with an IDE interface; and
6 the carrier including a PC card device and a plug, the carrier plug removeably
7 interconnects with the docking assembly plug to enable the PC card device to
8 communicate with the IDE interface.

9
10 8. A carrier and docking assembly as set forth in claim 7, wherein the
11 docking assembly has width of 5 ¼ inches for inserting the carrier in a 5 ¼ inch memory
12 storage bay.

13
14 9. A carrier and docking assembly as set forth in claim 7, wherein the
15 docking assembly has a width of 3 ½ inches for inserting the carrier in a 3 ½ inch
16 memory storage bay.

17
18 10. A carrier and docking assembly as set forth in claim 7, wherein the carrier
19 and docking assembly have rails for aligning the carrier with a docking assembly.

20
21 11. A carrier and docking assembly as set forth in claim 7, wherein the carrier
22 has a handle for removing the carrier from the docking assembly and for carrying the
23 carrier.


24
25 12. A carrier and docking assembly as set forth in claim 7, wherein the carrier
26 has a fan.

- 1 13. A carrier and docking assembly in combination for removeably
2 interconnecting a fan with a computer, comprising:
3 a docking assembly configured to be fixed in a bay of a computer housing, the
4 docking assembly includes a power connector;
5 a carrier including a fan, the carrier removeably plugs into the plug of the docking
6 assembly to enable the fan to cool the computer.

ABSTRACT

A carrier and docking assembly in combination for removeably interconnecting a PC card device with a computer. The docking assembly is configured in size to be fixed in a memory storage device bay of a computer housing, or a memory storage device housing. The docking assembly includes a plug for the carrier, a power connector and an interface connector. The interface connector is adapted for connection with an IDE ribbon cable. The carrier includes a PC card device for receiving PC cards and a plug for interconnection with the docking assembly. The carrier plug removeably couples with the plug of the docking assembly.

1/4
Behl 1318

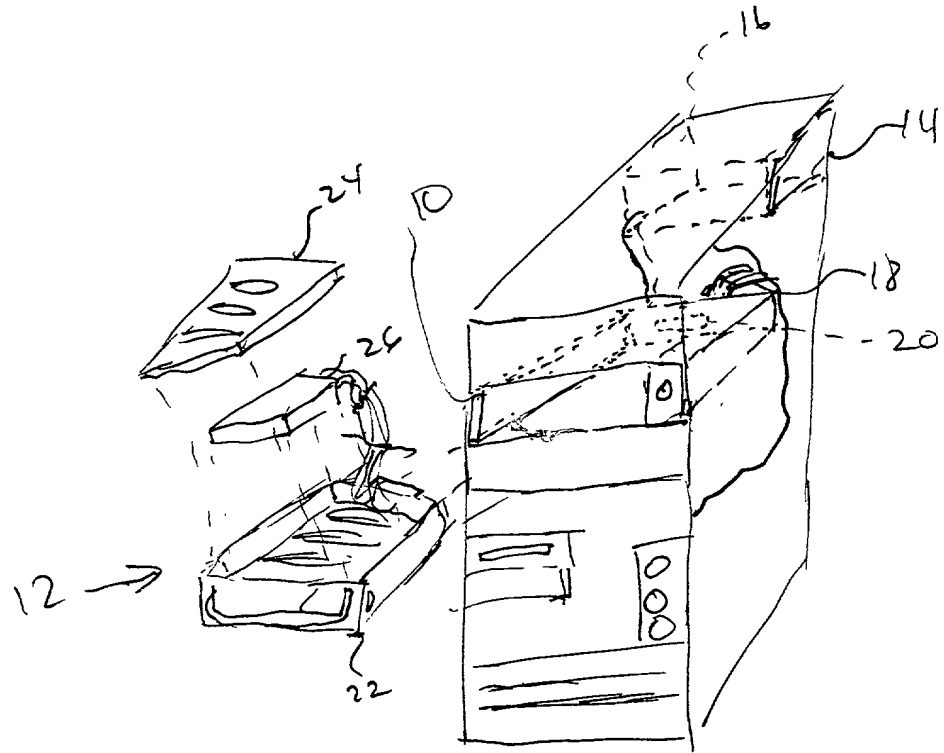

Prior Art
FIG. 1

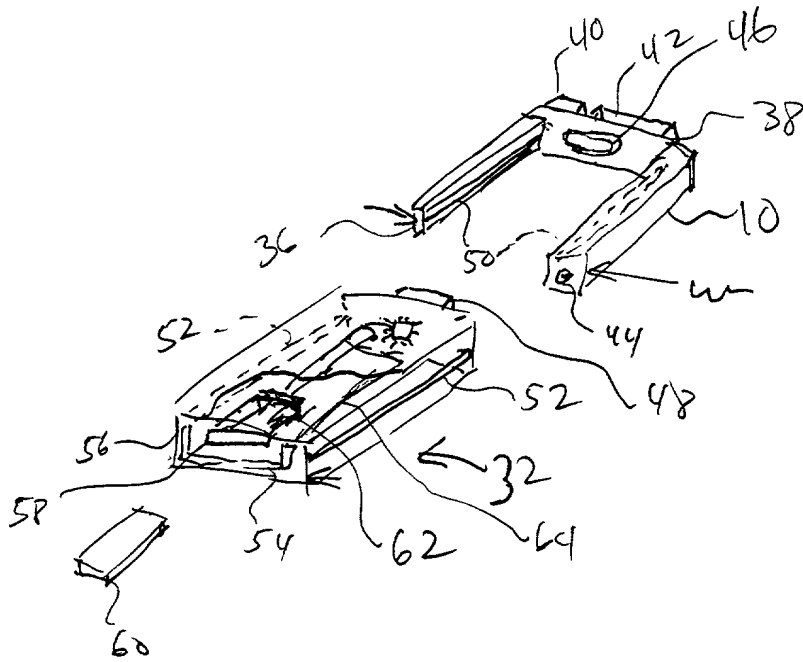


FIG. 2

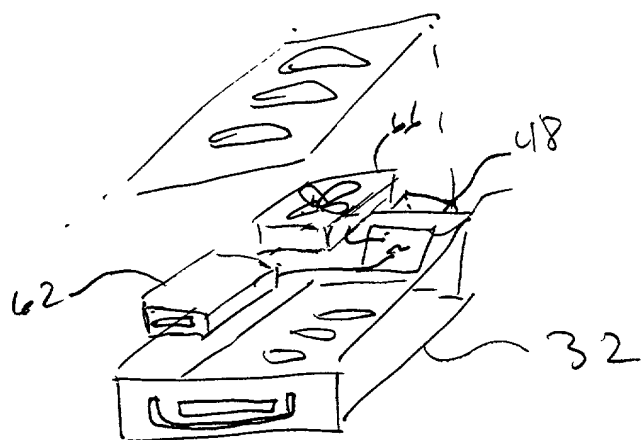


FIG. 3

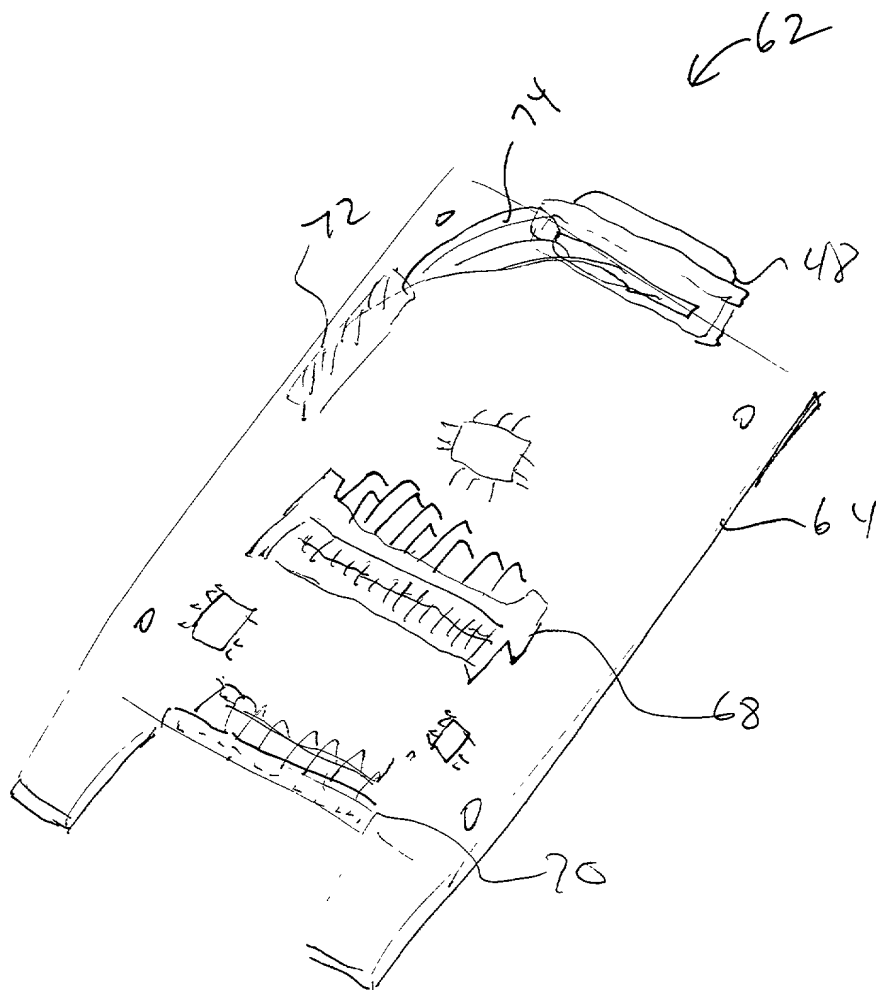


FIG. 4